


安装说明书

Installation Instruction

NUOMI诺米

全屋定制五金

预览图 Preview

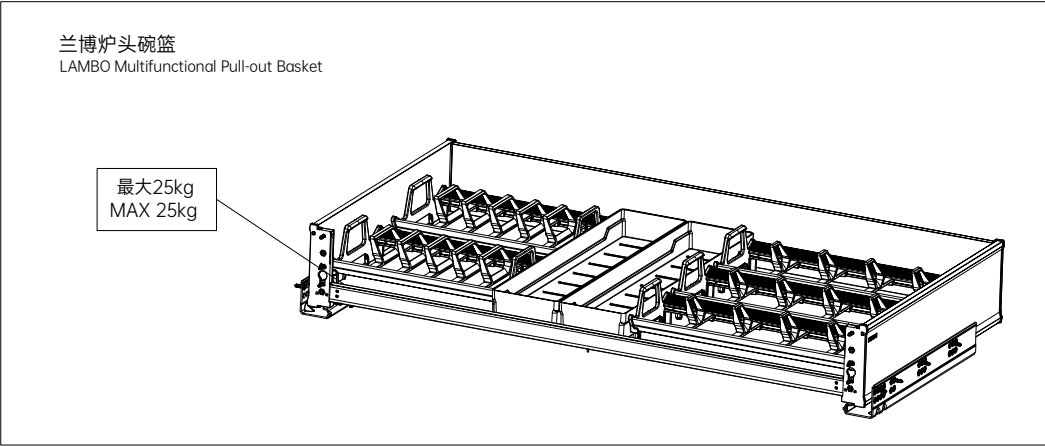

配件图 Parts list

A X 1SET 导轨 Slide	B X 1PCS 篮体 Basket	C X 8PCS 沉头自攻螺丝 Countersunk self-tapping screw	D X 6PCS 大扁头带介自攻螺丝 Large flat head self-tapping screw	E X 4PCS 机米螺丝 Machine screw	F X 1SET 装饰盖 Decorative cover
G X 1PCS 纸膜 Guide cardboard	H X 2PCS 碟架 Dish rack	I X 3PCS 碗架 Bowl rack	J 900柜X 2PCS 800柜X 1PCS 750柜X 1PCS 700柜X 1PCS 600柜X 1PCS 收纳盒 Storage box		

产品规格与适装柜宽 Product Specifications and Applicable Cabinet Width

型号 (太郎灰) Item No.(Highclass Grey)	规格(宽x深x高)mm Specifications(W×D×H)mm	适应柜内空宽度(Y)mm Applicable Cabinet Inner Width(Y)mm	适用柜体 Applicable cabinet width(mm)
3236002	564-568*448*134	564-568mm	600柜
3237002	664-668*448*134	664-668mm	700柜
3237502	714-718*448*134	714-718mm	750柜
3238002	764-868*448*134	764-768mm	800柜
3239002	864-868*448*134	864-868mm	900柜

安装步骤 Installation Steps

1.根据尺寸安装导轨
Slide installation

2.安装篮体到导轨
Basket installation

16/18板调节
16/18mm board adjustment

有活动片
With movable shim
18板厚
18mm thickness

无活动片
Without movable shim
16板厚
16mm thickness

18板厚
18mm thickness

16板厚
16mm thickness

默认18柜板厚度, 16板时调整导轨扣与尾勾往两边靠
The default cabinet board thickness is 18mm, adjust the slide buckles and tail hooks towards both sides when using 16mm boards.

3.安装门板挂接螺丝
Install screws on the door panel

①将纸模G按照示意图与门板对齐;
Align G to the door panel.

②按照纸模G上的孔位钻孔;
Drill holes according to G.


③移开纸模G将扁头螺丝D对准引孔只拧一半。
Move G and screw D halfway into the holes.

● 安装步骤 Installation Steps

4. 安装门板

Door pane l installation

- ① 将机米螺丝E按照示意图位置对准孔位拧入篮体;
Screw E into the holes.
- ② 将门板上的扁头螺丝D挂入篮体的钥匙孔;
Insert D on the door panel into holes on the basket.
- ③ 调整好门板左右上下位置后拧紧两颗螺丝D;
Adjust the position of door panel and tighten D.
- ④ 扣上装饰盖F。
Insert F.

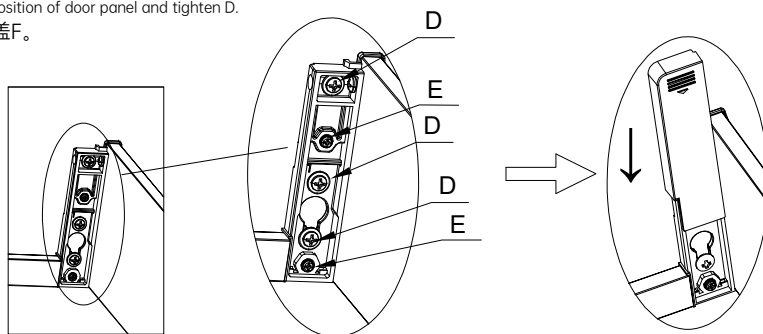


D调节门板上下左右
D :Adjust the up, down, left, and right of door panel
E调节门板垂直
E: Adjust the verticality of door panel

5. 碟架支架调整

Dish rack adjustment

根据碟的实际大小移动碟架支架到合适间距后按图示方向旋转锁紧;
Adjust the spacing and rotate for tightening.

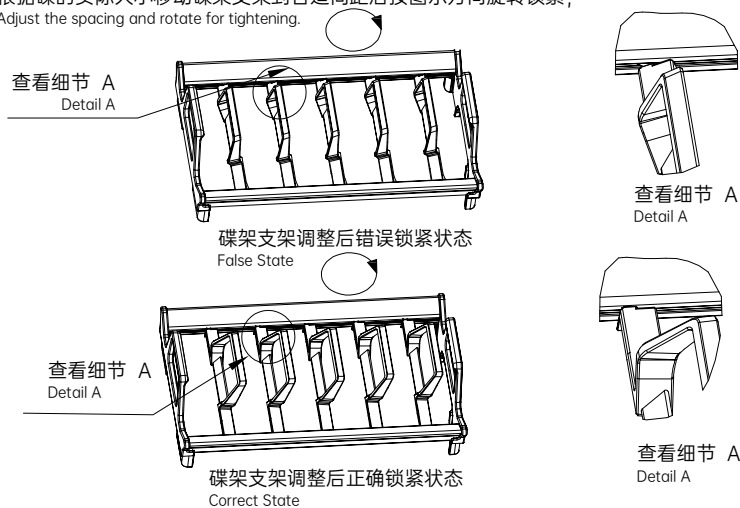


● 安装步骤 Installation Steps

6. 碗架支架调整

Bowl rack adjustment

根据碗的实际大小移动碗架支架到合适间距后按图示方向旋转锁紧;
Adjust the spacing and rotate for tightening.

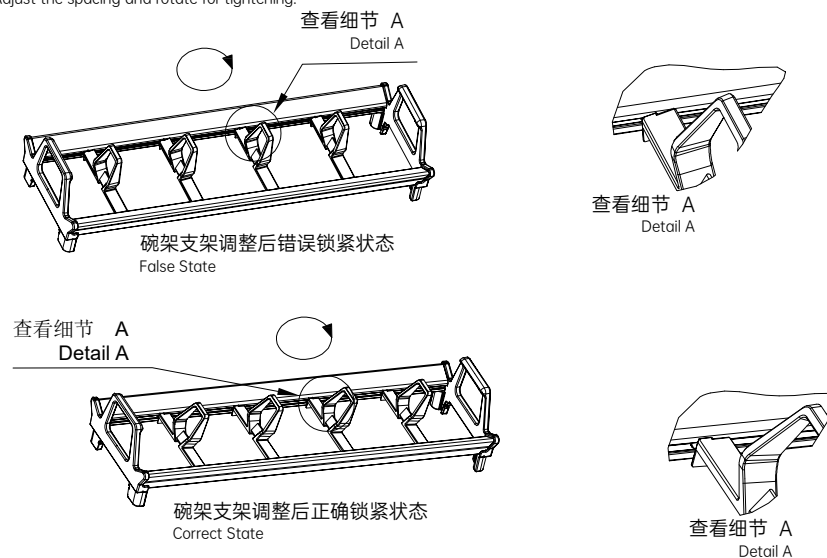

7. 放置配件

Insert accessories

